




IFB Roller Industry Co.,Ltd

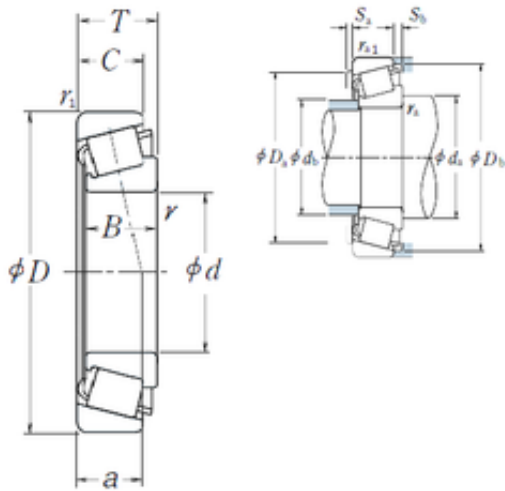

NSK 32260 tapered roller bearings

Bearing No. 32260

Size	300x540x149 mm
Bore Diameter	300 mm
Outer Diameter	540 mm
Width	149 mm
d	300 mm
D	540 mm
T	149 mm
B	140 mm
C	115 mm
a	131,6 mm
r min.	6 mm
r1 min.	5 mm
da min.	333 mm
Da min	458 mm
Da max.	518 mm
db max.	352 mm
Db min.	514 mm
ra max.	5 mm
rb max.	4 mm
Weight	132 Kg
Basic dynamic load rating (C)	2220 kN
Basic static load rating (C0)	3700 kN
(Grease) Lubrication Speed	600 r/min
(Oil) Lubrication Speed	800 r/min
Calculation factor (e)	0,46
Calculation factor (Y0)	0,72

32260 Bearing 2D drawings and 3D CAD models



IFB Roller Industry Co.,Ltd

LangID	1
outer r	5
D_	540
TC-BET22	0
TC-BET21	4
TC-BET23	0
inner r	6
mass	132
GRS rpm	600
D_b	514
Cr	226000
TC-RA	868.297
DE_	478.495
T-ALP23	0
db	352
T-ALP22	0
Prod_Type3	TRBSR_MD_A
da	333
T-ALP21	34
Iso	-
ALPHA_	17
SDM_	423.563
SBRG	22
D_a2	458
hidYobi	32260
Y1	1.3
D_a1	518
B_	140
hidTable	ecat_NSTPRM
Oil rpm	800
C0r	380000
Y0	0.72



IFB Roller Industry Co.,Ltd

TC-SLR	98
inner ra	5
outer rb	4
C0	3700
Sa	15
Sb	34
e	0.46
DA_	57.201
Z_	19
C_	115
yobi	32260
TC-DA1	60.602
TC-DA2	53.799
KBRG	3111
DI_	368.631